




### Description

Surface mounted LED linear wide diffused batten.

### Application

Suitable for commercial, industrial and domestic applications.

### Photometric

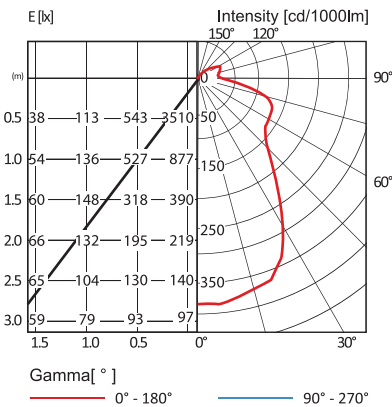

IES file No: SJ5158

### Options

- T8 LED Tube
- Opal Diffuser
- Dimming
- Emergency
- 3000K / 6500K


### Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	24W
<b>Lumen Output</b>	>2350lm
<b>CRI</b>	80
<b>LER</b>	97
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

### Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	AA12 Acrylic

### Dimension



### Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PDBW A5	624x120x108	Tridonic	12	>1150	96
PDBW A5	624x120x108	Tridonic	20	>2150	108
PDBW B5	624x120x108	Tridonic	24	>2350	97
PDBW B5	624x120x108	Tridonic	39	>4350	111
PDBW B5	1234x120x108	Tridonic	24	>2350	97
PDBW B5	1234x120x108	Tridonic	39	>4350	111
PDBW D5	1234x120x108	Tridonic	48	>4650	97
PDBW D5	1234x120x108	Tridonic	78	>8750	112

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.

For the latest product information please visit <http://www.sirijaya.com>